


PRODUCT

N.15S

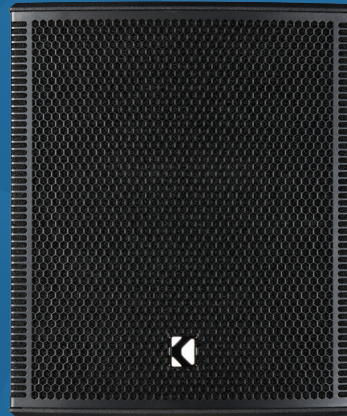

we connect sound to the community

FEATURES

- 15" Low Frequency Neodymium Driver
- Premium Birch PlyWood 15T Enclosure
- Dedicated Passive Network & Active Switch
- Provide DSP Data

SPECIFICATIONS

Type	Active & Passive	Normal Impedance	8Ω
Sensitivity (1W/1m)	98dB	Net Weight	43.30 kg
Frequency Range (-10dB)	30Hz~760Hz	Dimensions (WxHxDmm)	491 x 591 x 699mm
Max SPL (Peak)	132dB	Rigging Point	20xM10 inserts (5x top, 5x bottom, 2x Rear, 4x left, 4x right)
AES Power / Program Power / Peak Power	700W / 1400W / 2800W	Connection	2 X SPEAKON(1+,1-) [Parallel], Active & LPF Switch
Dispersion Angle(Horn)	Omni	Painting	Polyurea Coating



Head office 160-1, Jong-ro, Jongro-gu, Seoul Rep. of Korea Tel +82.10.5223.5997 www.koon-audio.net