


PRODUCT

# K.6

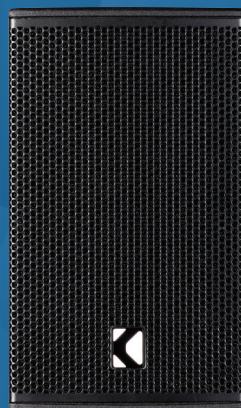

we connect sound to the community

## FEATURES

- Minimum Size Full-Range Speaker
- 6.5" Mid Low & Mid Range Frequency Transducer
- 1" High Frequency Compression Driver
- High density 12T MDF Enclosure
- Dedicated Passive Network
- Provide DSP Data

## SPECIFICATIONS

|                         |            |                      |  |
|-------------------------|------------|----------------------|--|
| Type                    | Passive    | Normal Impedance     | 8Ω   |
| Sensitivity (1W/1m)     | 92dB       | Net Weight           | 8.87kg   |
| Frequency Range (-10dB) | 85Hz~20kHz | Dimensions (WxHxDmm) | 216 X 385 X 236mm  |
| Max SPL (Peak)          | 121.4dB    | Rigging Point        | 7 X M10 inserts<br>(4 X top, 1 X bottom, 1 X left, 1 X right)<br>Single Hole Cup |
| AES Power (8Ω)          | 220W       | Connection           | 2 X SPEAKON(1+,1-) [Parallel]  |
| Dispersion Angle (Horn) | 80° x 60°  | Painting             | Polyurea Coating   |



Head office 160-1, Jong-ro, Jongro-gu, Seoul Rep. of Korea Tel +82.10.5223.5997 [www.koon-audio.net](http://www.koon-audio.net)